



Sharklift 4.65 F 550

Electro-hydraulic 4-ram lift, 6.5 t capacity, platforms



Application

- ☐ Check-in
- ☐ Repairs and maintenance
- ☐ Wheel alignment
- ☐ Testing

Description:

Steel cassette:

- ☐ Waterproof steel cassette

Hydraulic unit:

- ☐ 2 separate hydraulic units with hard-chrome plated cylinders
- ☐ Electronic synchronization between the hydraulic units and pre-programmed top stop
- ☐ Flexible synchronization and safety system
- ☐ Corrosion-free guiding elements
- ☐ Pump unit with immersed motor
- ☐ Hydraulic oil
- ☐ Pneumatic emergency lowering
- ☐ Programmable pushbutton control unit
- ☐ Air preparation unit for oiled and regulated compressed air (min . 6 bar / max . 10 bar)

Superstructure:

- ☐ A set of platforms with drive-on ramps and stops
Platforms with tolerances of only max $\pm 0,5$ mm length- and crosswise
- ☐ With two recesses front and rear, as well as distance pieces covering the entire length and fixated by steel edges in sides
- ☐ Preparation for innovative air supply for jacking beam

Colour according to approval:

- ☐ RAL 7015 - slate grey

Versions:

Steel cassette:

- ☐ Zinc-coated
- ☐ Coated

Installation:

- ☐ Superstructure on floor
- ☐ Superstructure in floor with or without flush-floor device

Contact us with regard to the possibilities of combining with other wheel alignment equipment!

Optional extras:

- ☐ LED-lighting set
- ☐ Precision slip plates
- ☐ Scissor jack



Click the QR-Code
for detailed product information.

Further Information on
www.autopstenhoj.com

AUTOPSTENHOJ GMBH
Sandkampstr. 90
D-48432 Rheine
Tel. +49 5971 860202
Email: info@autopstenhoj.com

AUTOPSTENHOJ GMBH
Barrit Langgade 188-190
DK-7150 Barrit
Tel. +45 76 82 13 30
Email: info@autopstenhoj.com



Recommended by Mercedes Benz
H41 01 08 1P

Technical data

Lifting capacity	6,500 kg
Lifting height	1,865 mm
Working height	2,060 mm
Cylinder diameter	4 x 213 mm
Distance between cylinders	1,550/3,000 mm
Lifting / lowering time (high pressure)	approx. 35 sec.
Foundation depth	2,625 mm
Pump unit	2 x 3 kW
Hydraulic oil	18 l
Voltage	230/400 V – 50 Hz – 16 A


Fv Uni superstructure

Usable length of platform	F 550: 5,500 mm
Wheel base	F 550: 4,850 mm
Platform width	650 mm
Distance between platforms	900 mm
Drive-on height	195 mm

Scissor jack (Option)

Lifting capacity	4,000 Kg
Lifting height	330 mm
Operation	air-hydraulic
Lift positions	middle/880 – 1,734 mm

The product meets the requirements for workshop equipment for MB service workshops and is recommended by Mercedes Benz with approval no. H41 01 08 1P.

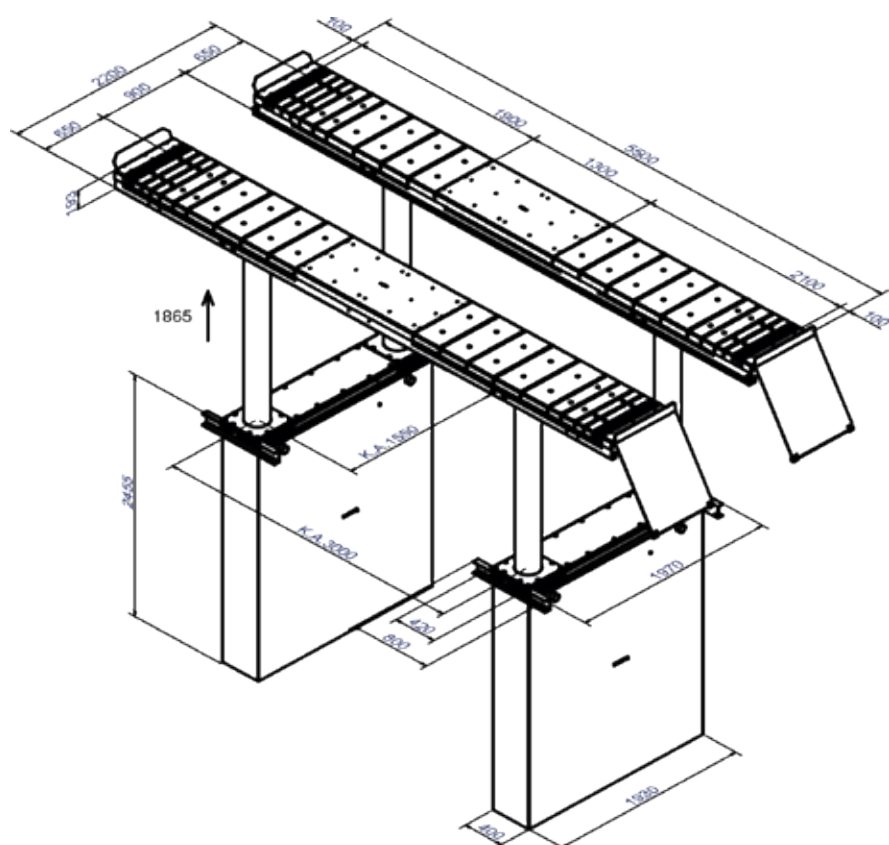

Slip plate fixed



Installation in
rectangular recess



Slip plate and MKS adaptor