



Masterlift 2.35 Pv 160-220 xy

Electro-hydraulic twin-ram lift, 3.5 t capacity, superstructure with flat lifting supports



Application

- ☐ Check-in
- ☐ Repairs and maintenance
- ☐ Testing

Description:

Steel cassette:

- ☐ Waterproof steel cassette

Hydraulic unit:

- ☐ Hard-chrome plated cylinder
- ☐ Flexible synchronization and safety system
- ☐ Corrosion-free guiding elements
- ☐ Pump unit with immersed motor
- ☐ Hydraulic oil
- ☐ Pneumatic emergency lowering
- ☐ Programmable pushbutton control unit

Superstructure:

- ☐ Stable lifting supports, lengthwise adjustable
- ☐ Rubber-coated, non-skid pads
- ☐ Low minimum height

Colour according to approval:

- ☐ Pv Premium: zinc coated and painted
RAL 7015 – slate grey

Versions:

Steel cassette:

- ☐ Zinc-coated
- ☐ Coated
- ☐ Self-carrying

Superstructure:

- ☐ Pv Premium: zinc coated and painted

Installation:

- ☐ Superstructure on floor
- ☐ Superstructure in floor
- ☐ Ceiling installation

Optional extras:

- ☐ XY-pads
- ☐ Sets of rubber blocks,
40, 60, 80 and 100 mm
- ☐ Traverse

The product meets the requirements for workshop equipment for MB service workshops and is recommended by Mercedes Benz with approval no. H13 01 01 1A.



Click the QR-Code
for detailed product information.

Further Information on
www.autopstenhoj.com

AUTOPSTENHOJ GMBH
Sandkampstr. 90
D-48432 Rheine
Tel. +49 5971 860202
Email: info@autopstenhoj.com

AUTOPSTENHOJ GMBH
Barrit Langgade 188-190
DK-7150 Barrit
Tel. +45 76 82 13 30
Email: info@autopstenhoj.com




Recommended by Mercedes Benz
H13 01 01 1A

Technical data

Lifting capacity	3,500 kg
Lifting height	1,950 mm
Working height	2,015 mm + rubber pads
Cylinder diameter	2 x 123 mm
Distance between cylinders	1,335 mm
Lifting / lowering time (high pressure)	approx. 30 sec.
Foundation depth	2,625 mm
Pump unit	3 kW
Hydraulic oil	10 l
Voltage	230 / 400 V – 50 Hz – 16 A

Pv superstructure

Total width min. – max.	160 – 220: approx. 1,600 – 2,200 mm
Min. height	65 mm

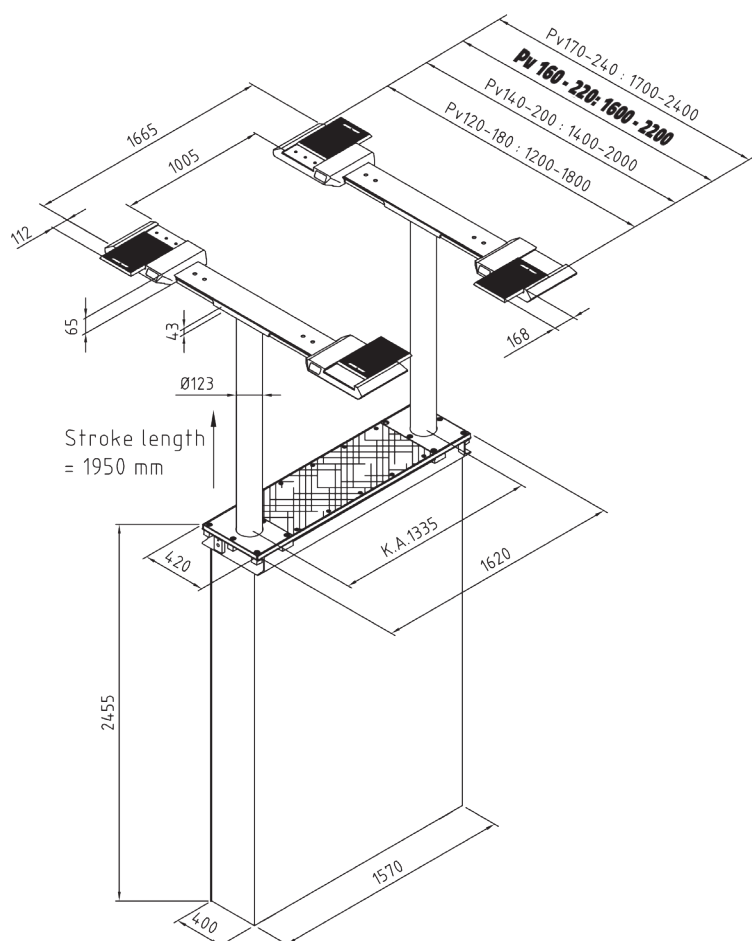

XY-pads with rubber



Various pads



Solid lifting supports,
zinc coated and painted