

Biglift 2.50 Saa 265

Electro-hydraulic twin-ram lift, 5 t with superstructure with arms





Application

- □ Repair and maintenance
- ☐ Body work

Description:

Steel cassette:

□ Waterproof steel cassette

Hubeinheit:

- ☐ Hard-chrome plated cylinder
- ☐ Flexible synchronization and safety system
- ☐ Corrosion-free guiding elements
- ☐ Pump unit with immersed motor
- ☐ Hydraulic oil
- ☐ Pneumatic emergency lowering
- ☐ Programmable pushbutton control unit
- Great stability, even with uneven weight distribution due to the cylinder diameter of 213 mm

Superstructure:

- □ Double telescopic arms
- □ Internal arm locking system
- □ Low minimum height
- ☐ Mechanical ratchet system integrated in the hydraulic unit
- □ Air preparation unit for oiled and regulated compressed air (min . 6 bar / max . 10 bar)

Colour according to approval:

□ RAL 7015 slate grey

Versions:

Steel cassette:

- ☐ Zinc-coated
- Coated
- □ Self-carrying

Installation:

- ☐ Superstructure on floor
- ☐ Superstructure in floor with covers
- □ Ceiling installation

Optional extras:

☐ Large program of extra pads





Click the QR-Code for detailed product information.

Further Information on www.autopstenhoj.com

AUTOPSTENHOJ GMBH

Sandkampstr. 90 D-48432 Rheine Tel. +49 5971 860202 Emai: info@autopstenhoj.com

AUTOPSTENHOJ GMBH

Barrit Langgade 188-190 DK-7150 Barrit Tel. +45 76 82 13 30 Emai: info@autopstenhoj.com




Recommended by Mercedes Benz H21 01 04 1B

Technical data	
Lifting capacity	5,000 kg
Lifting height	1,865 mm
Working height	2,000 – 2,060 mm
Cylinder diameter	2 x 213 mm
Distance between cylinders	2,650 mm
Lifting / lowering time	approx. 45 sec.
Foundation depth	2,625 mm
Pump unit	3 kW
Hydraulic oil	17 l
Voltage	230/400 V – 50 Hz – 16 A

Arm superstructure	
Total width	2.950 mm
Lifting pad included in the delivery	11028 (135 – 195 mm)
Min. height	135 – 195 mm
Drive-through width	2.430 mm
Arm length, min max.	715 – 1.410 mm

The product meets the requirements for workshop equipment for MB service workshops and is recommended by Mercedes Benz with approval no. H21 01 04 1B.

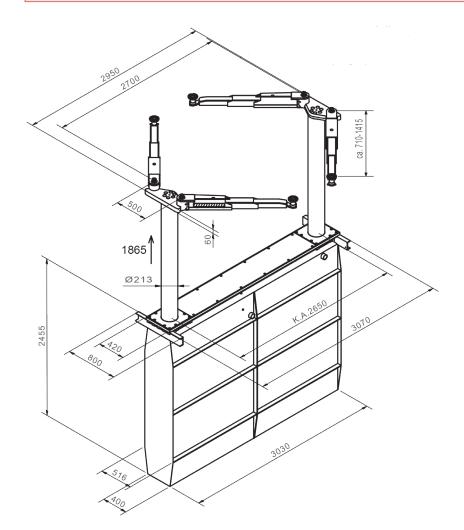



Superstructure on floor



Superstructure with lifting pads and wheel adaptors

