


Biglift 2.65 Saaa 265

Electro-hydraulic twin-ram lift, 6.5 t capacity, superstructure with arms

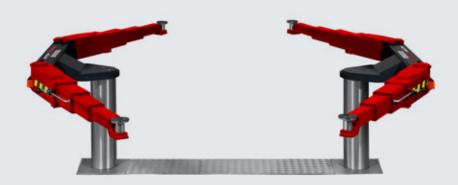

Application

- ☐ Repairs and maintenance
- ☐ Body work

Description:

Steel cassette:

□ Waterproof steel cassette

Hydraulic unit:

- ☐ Hard-chrome plated cylinder
- ☐ Flexible synchronization and safety system
- ☐ Corrosion-free guiding elements
- ☐ Pump unit with immersed motor
- ☐ Hydraulic oil
- ☐ Pneumatic emergency lowering
- ☐ Programmable pushbutton control unit
- Great stability, even with uneven weight distribution; due to the cylinder diameter of 213 mm

Superstructure:

- ☐ Triple telescopic arms
- ☐ Wheel bearing of the first extension arm
- □ Low minimum height
- Mechanical ratchet system integrated in the hydraulic unit
- ☐ Air preparation unit for oiled and regulated compressed air (min . 6 bar / max . 10 bar)

Colour according to approval:

□ RAL 7015 - slate grey

Versions:

Steel cassette:

- ☐ Zinc-coated
- □ Coated
- ☐ Self-carrying (Saaa 230)

Installation:

- ☐ Superstructure on floor
- ☐ Superstructure in floor with covers
- □ Ceiling installation

Optional extras:

☐ Large program of extra pads





Click the QR-Code for detailed product information.

Further Information on www.autopstenhoj.com

AUTOPSTENHOJ GMBH

Sandkampstr. 90 D-48432 Rheine Tel. +49 5971 860202 Emai: info@autopstenhoj.com

AUTOPSTENHOJ GMBH

Barrit Langgade 188-190 DK-7150 Barrit Tel. +45 76 82 13 30 Emai: info@autopstenhoj.com



Recommended by Mercedes Benz H21 01 04 1A

Technical data	
Lifting capacity	6,500 kg
Lifting height	1,865 mm
Working height	2,000 - 2,060 mm
Cylinder diameter	2 x 213 mm
Distance between cylinders	2,650 mm
Lifting / lowering time (high pressure)	approx. 45 sec.
Foundation depth	2,625 mm
Pump unit	3 kW
Hydraulic oil	18
Voltage	230/400 V – 50 Hz – 16 A

Arm superstructure	
Total width	3,350 mm
Lifting pad included in the delivery	11028 (135 – 195 mm)
Min. height	135 – 195 mm
Drive-through width	2,430 mm
Arm length, min max.	770 – 1,640 mm

The product meets the requirements for workshop equipment for MB service workshops and is recommended by Mercedes Benz with approval no. H21 01 04 1A.

