

Recommended by Mercedes Benz

H23 13 10 7A



Biglift 2.65 F 550

Electro-hydraulic twin-ram lift, 6.5 t capacity, platforms



Application

- ☐ Check-in
- ☐ Repairs and maintenance
- ☐ Testing

Description:

Steel cassette:

- ☐ Waterproof steel cassette

Hydraulic unit:

- ☐ Hard-chrome plated cylinder
- ☐ Flexible synchronization and safety system
- ☐ Corrosion-free guiding elements
- ☐ Pump unit with immersed motor
- ☐ Hydraulic oil
- ☐ Pneumatic emergency lowering
- ☐ Programmable pushbutton control unit
- ☐ Great stability, even with uneven weight distribution; due to the cylinder diameter of 213 mm

Superstructure:

- ☐ A set of platforms with drive-on ramps and stops

Colour according to approval:

- ☐ RAL 7015 - slate grey

Versions:

Steel cassette:

- ☐ Zinc-coated
- ☐ Coated

Installation:

- ☐ Superstructure on floor
- ☐ Superstructure in floor

Optional extras:

- ☐ LED-lighting set
- ☐ Scissor jack

The product meets the requirements for workshop equipment for MB service workshops and is recommended by Mercedes Benz with approval no. H23 13 10 7A.



Click the QR-Code
for detailed product information.

Further Information on
www.autopstenhoj.com

AUTOPSTENHOJ GMBH
Sandkampstr. 90
D-48432 Rheine
Tel. +49 5971 860202
Email: info@autopstenhoj.com

AUTOPSTENHOJ GMBH
Barrit Langgade 188-190
DK-7150 Barrit
Tel. +45 76 82 13 30
Email: info@autopstenhoj.com



Recommended by Mercedes Benz
H23 13 10 7A

Technical data


Lifting capacity	6,500 kg
Lifting height	1,860 mm
Working height	2,040 mm
Cylinder diameter	2 x 213 mm
Distance between cylinders	1,550 mm
Lifting / lowering time (high pressure)	approx. 45 sec.
Foundation depth	2,665 mm
Pump unit	3 kW
Hydraulic oil	17 l
Voltage	230 / 400 V – 50 Hz – 16 A

Platforms

Total length	approx. 6,800 mm
Usable length of platform	5,500 mm
Wheel base	approx. 5,000 mm
Platform width	650 mm
Distance between platforms	900 mm
Drive-on height	180 mm

Scissor jack (Option)


Lifting capacity	4,000 Kg
Lifting height	330 mm
Operation	air-hydraulic
Lift positions	middle / 880 – 1,734 mm

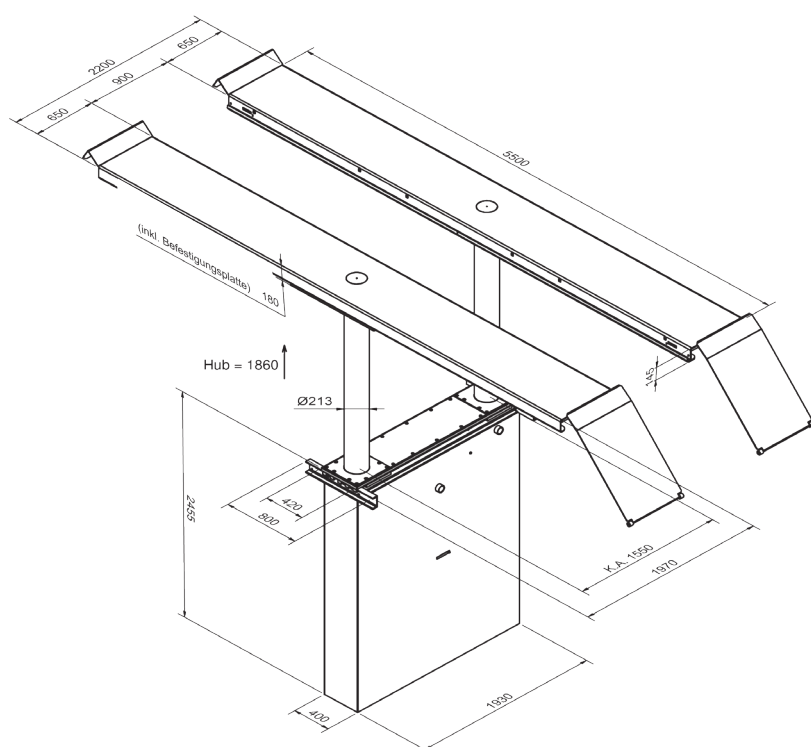

Scissor jack



Non-skid surface

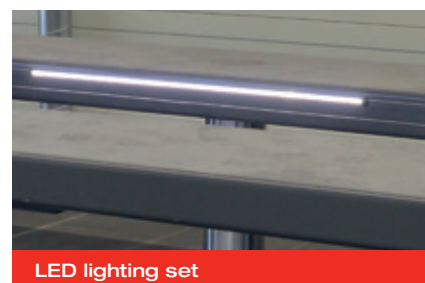

LED lighting set