

Recommended by Mercedes Benz

H22 13 10 7A



# Biglift 4.55 Combi

Electro-hydraulic 2x twin-ram lift, 5.5 t capacity, platforms and free-wheel lift with arms



## Application

- ☐ Check-in
- ☐ Repairs and maintenance
- ☐ Testing

## Description:

### Steel cassette:

- ☐ Waterproof steel cassette

### Hydraulic unit:

- ☐ Hard-chrome plated cylinder
- ☐ Flexible synchronization and safety system
- ☐ Corrosion-free guiding elements
- ☐ Pump unit with immersed motor
- ☐ Hydraulic oil
- ☐ Pneumatic emergency lowering
- ☐ Programmable pushbutton control unit  
great stability, even with uneven weight  
distribution (all 4 cylinders in operation)

### Superstructure:

- ☐ A set of platforms with drive-on ramps and stops

### Free-wheel device Saav:

- ☐ Double telescopic arms, crosswise adjustable
- ☐ Internal arm locking system
- ☐ Low minimum height

### Colour according to approval:

- ☐ RAL 7015 - slate grey

## Versions:

### Steel cassette:

- ☐ Zinc-coated
- ☐ Coated

### Installation:

- ☐ Superstructure on floor
- ☐ Superstructure in floor with or  
without flush floor device

## Optional extras:

- ☐ LED-lighting set
- ☐ Large program of extra pads



**Further Information on  
[www.autopstenhoj.com](http://www.autopstenhoj.com)**

**AUTOPSTENHOJ GMBH**  
Barrit Langgade 188-190  
DK-7150 Barrit  
Tel. +45 76 82 13 30  
Email: [info@autopstenhoj.com](mailto:info@autopstenhoj.com)




Recommended by Mercedes Benz  
H22 13 10 7A

Technical data	
Lifting capacity	5,500 kg
Lifting height	1,895 mm
Working height	F: 2,060 mm RFH 2,195 - 2,255 mm
Cylinder diameter	8 x 140 mm
Distance between cylinders	1,240 – 1,850 mm
Lifting / lowering time (high pressure)	approx. 38 sec.
Foundation depth	2,640 mm
Pump unit	3 kW
Hydraulic oil	20 l
Voltage	230 / 400 V – 50 Hz – 16 A

Arm superstructure	
Total width	3,134 mm
Lifting pad included in the delivery	11028 (135 – 195 mm)
Min. height	165 – 220 mm
Arm length, min. - max.	725 – 1,410 mm

Platforms	
Total length	approx. 6,800 mm
Usable length of platform	5,500 mm
Wheel base	approx. 5,000 mm
Platform width	650 mm
Distance between platforms	900 mm
Drive-on height	165 mm


The product meets the requirements for workshop equipment for MB service workshops and is recommended by Mercedes Benz with approval no. H22 13 10 7A.

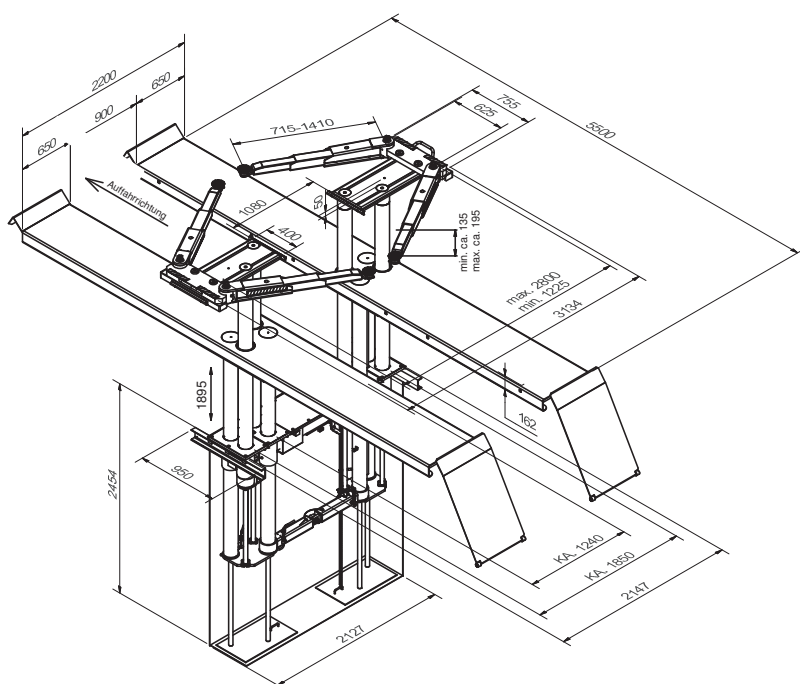

**Sturdy lift with Saav free-wheel lift**



### LED lighting set

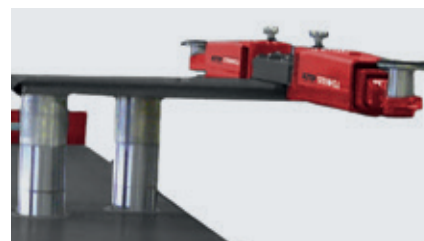

## Slidable superstructure